

DEUTZ TCD 2.2 L3

Powerful, efficient and compact.



For Agricultural Equipment

The TCD 2.2 – With up to 55.4 kW power output ideal for your application.



- **POWERFUL** / Up to 55.4 kW & 280 Nm
- **LOW EMISSIONS** / EU Stage V & HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Industrial version



*Emission Flex Package

DEUTZ TCD 2.2


— TCD 2.2

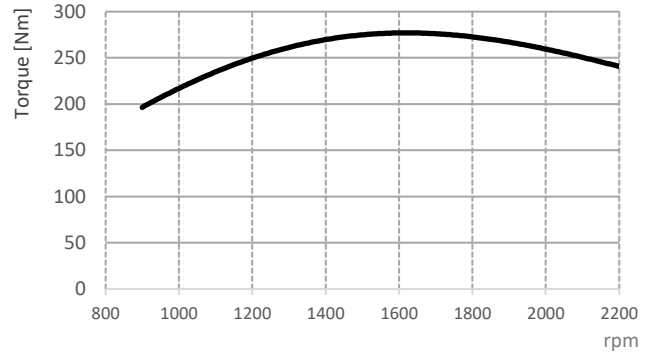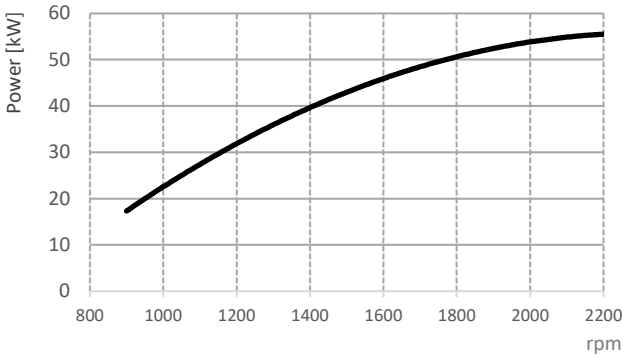

TECHNICAL DATA

| ENGINE TYPE | TCD 2.2 | |
|-----------------------------|-------------------------------------|------|
| No. of Cylinders | 3 | |
| Displacement | l | 2.2 |
| Max. Nominal Speed | min ⁻¹ | 2600 |
| Aspiration | Turbocharger with charge air cooler | |
| Power Output acc. ISO 14396 | kW | 55.4 |
| At Speed | min ⁻¹ | 2600 |
| Max. Torque | Nm | 280 |
| At Speed | min ⁻¹ | 1600 |
| Min. Idling Speed | min ⁻¹ | 900 |
| Weight (DIN 70020 Part 7A) | kg | 316 |

DIMENSIONS

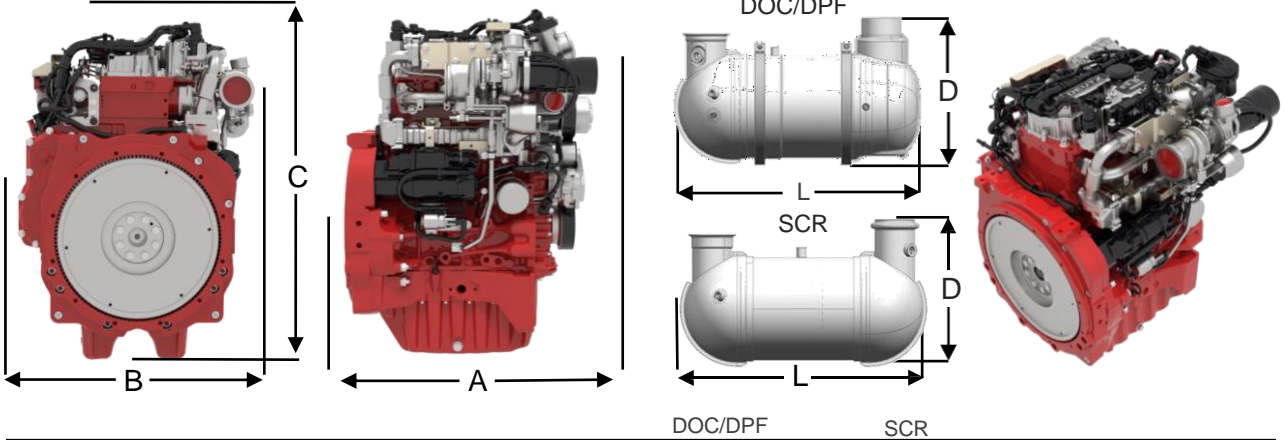

| ENGINE TYPE | A | B | C | D | L | D | L | DOC/DPF | SCR |
|-------------|----|-----|-----|-----|-----|-----|---|---------|-----|
| TCD 2.2 | mm | 587 | 609 | 807 | 199 | 470 | - | - | ● |

- Standard for US Tier 4
- Standard for EU Stage V



DEUTZ AG
 Ottostraße 1
 51149 Cologne
 Germany
www.deutz.com