

DEUTZ TCD 2.9 L4

Powerful, efficient and compact.



For Agricultural Equipment



The TCD 2.9 – with up to 77 kW power output ideal for your application.

- **POWERFUL** / Bis zu 77 kW & 420 Nm
- **LOW EMISSIONS** / EU Stage V, US Tier 4 & HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Industrial version & EDG - version (Stage IIIA, Tier 3)*



*Emission Downgrade without EAT


DEUTZ TCD 2.9

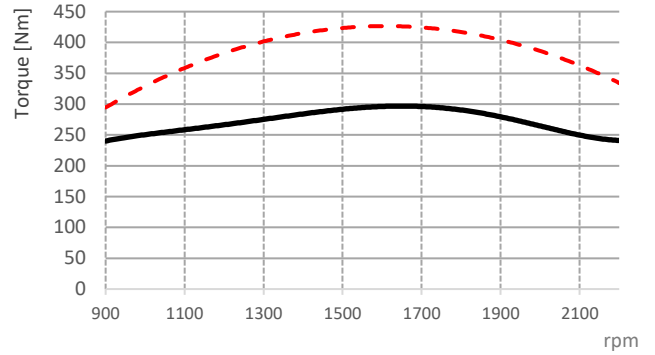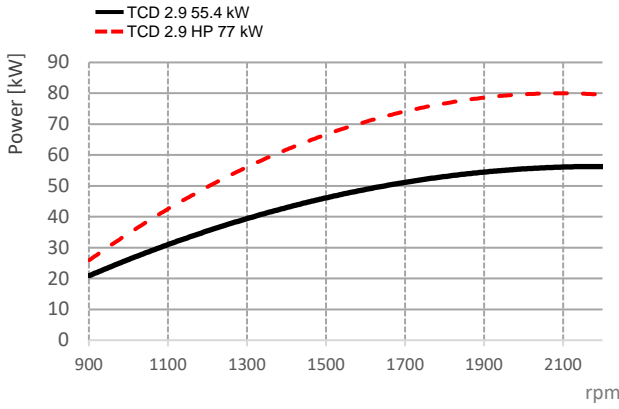

TECHNICAL DATA

ENGINE TYPE		TCD 2.9 55.4 kW	TCD 2.9 HP 77 kW
No. of Cylinders		4	4
Displacement	l	2,9	2,9
Max. Nominal Speed	min ⁻¹	2600	2600
Aspiration		Turbocharger with charge air cooler	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	55.4	77
At Speed	min ⁻¹	2200	2200
Max. Torque	Nm	375	420
At Speed	min ⁻¹	1400	1600
Min. Idling Speed	min ⁻¹	900	900
Weight (DIN 70020 Part 7A)	kg	300	300

DIMENSIONS

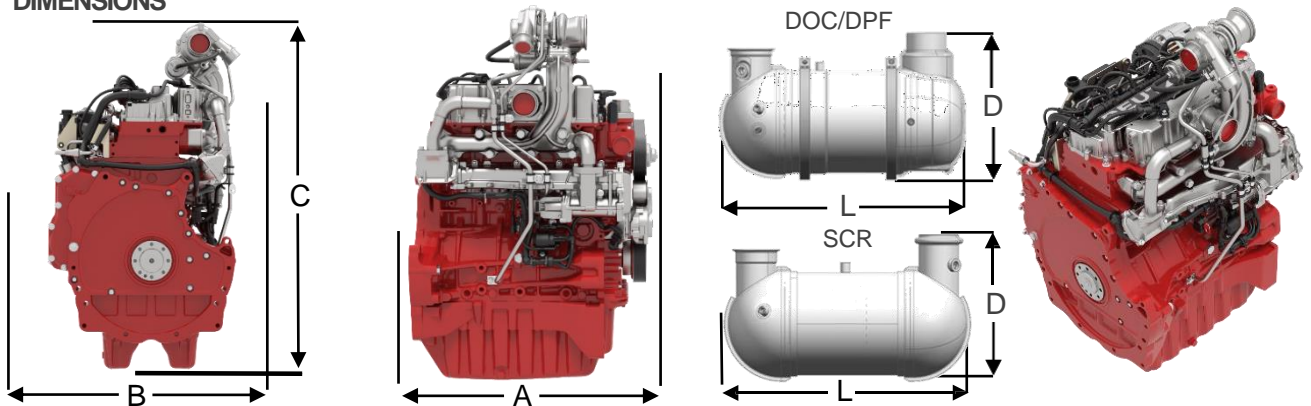

ENGINE TYPE		DOC/DPF				SCR			DOC	DOC/DPF	SCR
		A	B	C	D	L	D	L			
TCD 2.9 55.4 kW	mm	625	648	955	199	470	-	-	■	●	
TCD 2.9 HP 77 kW	mm	641	640	955	199	612	781	267	■	●	■

- Standard for US Tier 4
- Standard for EU Stage V

