

DEUTZ TCD 4.1 L4

Powerful, efficient and compact.



For mobile machinery

The TCD 4.1 – With 85 up to 115 kW power output ideal for your application.



- **POWERFUL** / Up to 115 kW & 609 Nm
- **LOW EMISSIONS** / EU Stg. V, US Tier 4, CN IV ready & HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Agricultural & EDG – version (Stage IIIA, Tier 3) *
- **POWERPACK** / Modular, compact & ready for installation



*Emission Downgrade without EAT

DEUTZ TCD 4.1


— TCD 4.1

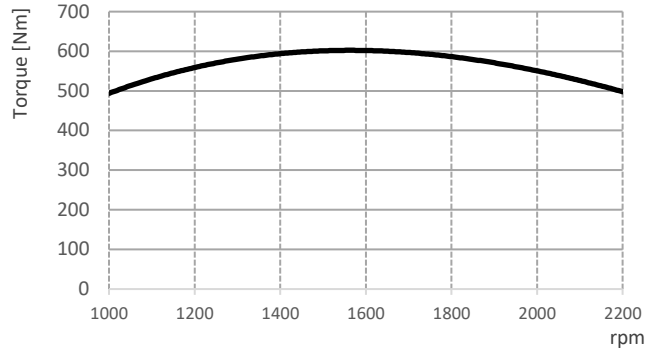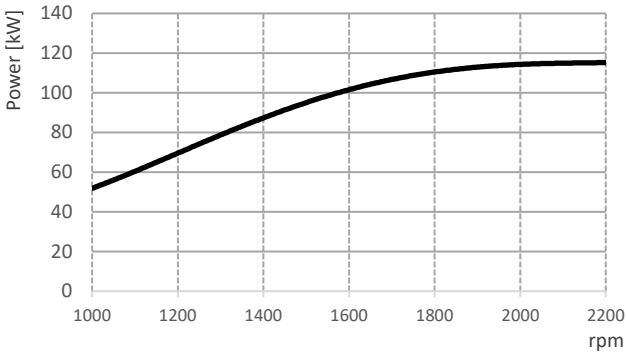

TECHNICAL DATA

ENGINE TYPE	TCD 4.1	
No. of Cylinders	4	
Displacement	l	4.038
Max. Nominal Speed	min ⁻¹	2300
Aspiration	Turbocharger with intercooler	
Power Output acc. ISO 14396	kW	80 - 115
At Speed	min ⁻¹	2300
Max. Torque	Nm	609
At Speed	min ⁻¹	1600
Min. Idling Speed	min ⁻¹	600
Weight (DIN 70020 Part 7A)	kg	400

DIMENSIONS

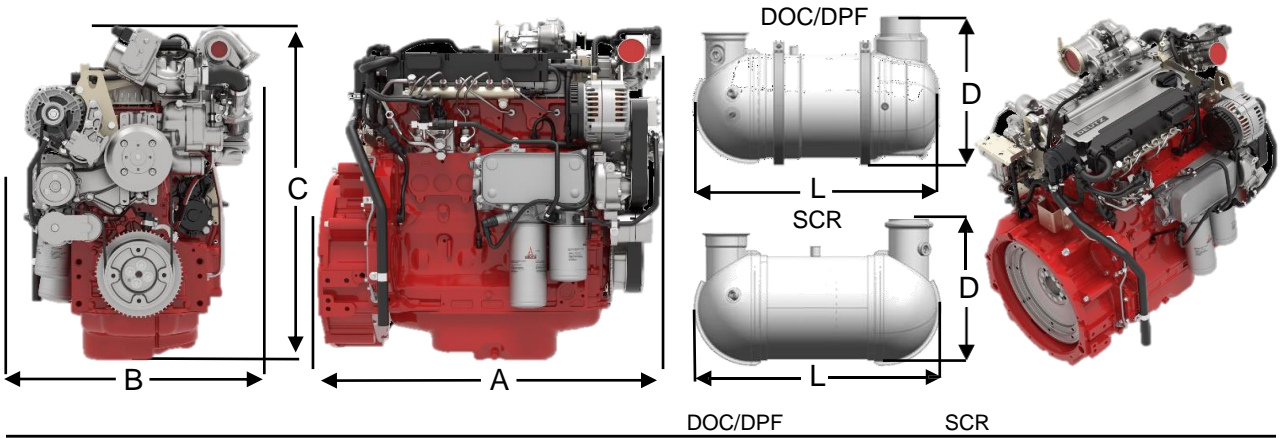

ENGINE TYPE		A	B	C	D	DOC/DPF		SCR	
TCD 4.1	mm	852	643	884	246	698	246	659	■ ■

- Standard for US Tier 4
- Standard for EU Stage V



DEUTZ AG
 Ottostraße 1
 51149 Cologne
 Germany
www.deutz.com