

# DEUTZ TCD 5.2 L4


Powerful, efficient and compact.



For mobile machinery

The TCD 5.2 – With 100 up to 170 kW power output ideal for your application.



- **POWERFUL** / Up to 170 kW & 950 Nm
- **LOW EMISSIONS** / EU St. V & US Tier 4 certified; HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / EDG - version\*

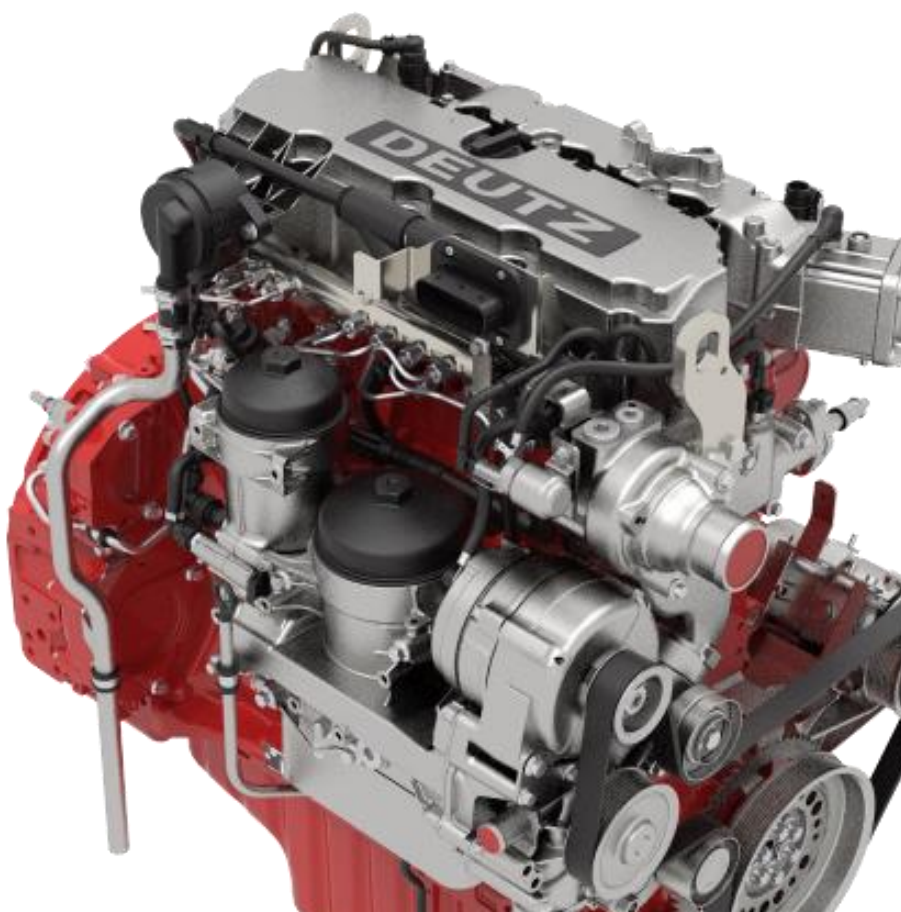

\*Emission Downgrade without EAT

DEUTZ TCD 5.2


— TCD 5.2

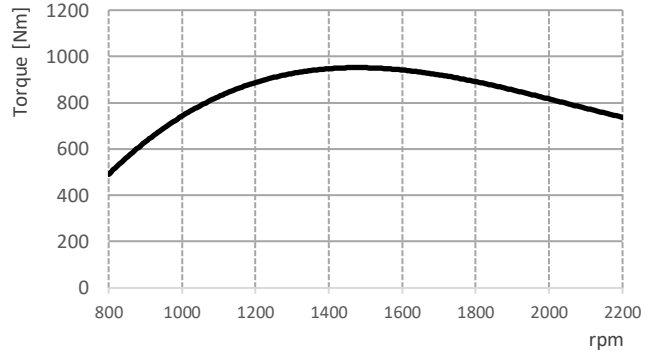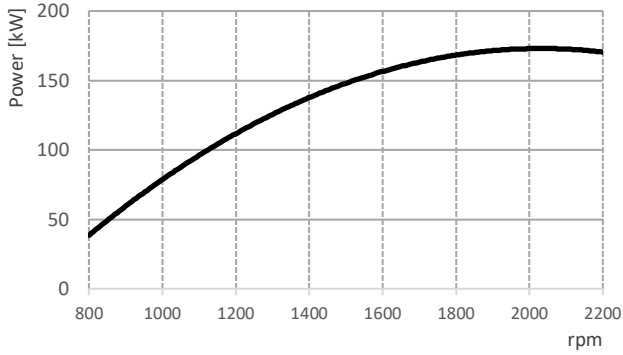

TECHNICAL DATA

ENGINE TYPE	TCD 5.2	
No. of Cylinders	4	
Displacement	l	5.2
Max. Nominal Speed	min <sup>-1</sup>	2300
Aspiration	Turbocharger with charge air cooler	
Power Output acc. ISO 14396	kW	170
At Speed	min <sup>-1</sup>	1800
Max. Torque	Nm	950
At Speed	min <sup>-1</sup>	1300
Min. Idling Speed	min <sup>-1</sup>	800
Weight (DIN 70020 Part 7A)	kg	approx. 530

DIMENSIONS

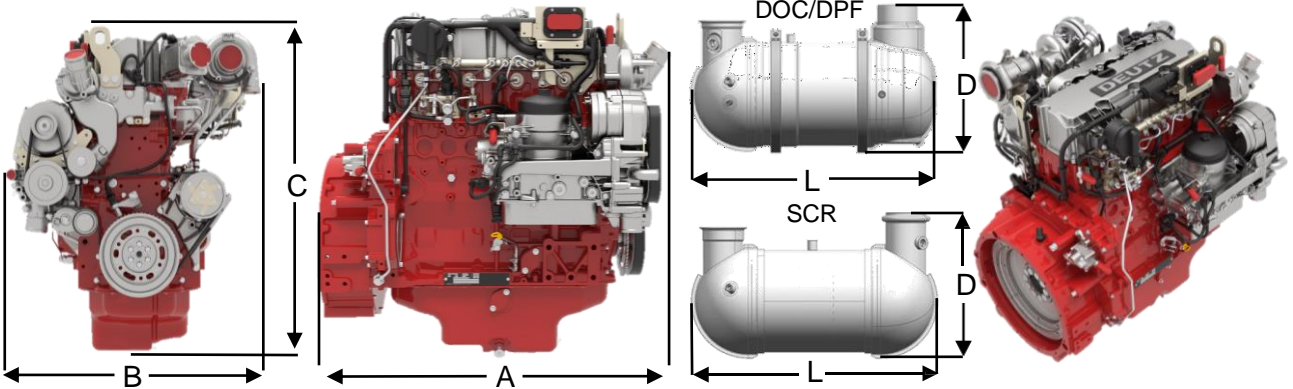

ENGINE TYPE		A	B	C	D	DOC/DPF		SCR		DOC/DPF	SCR
TCD 5.2	mm	949	753	973	318	640	289	635		● ●	● ●

■ Standard for US Tier 4  
● Standard for EU Stage V



**DEUTZ AG**  
 Ottostraße 1  
 51149 Cologne  
 Germany  
[www.deutz.com](http://www.deutz.com)