

DEUTZ TCD 3.6 L4

Powerful, efficient and compact.



For mobile machinery



The TCD 3.6 series – With 55 up to 105 kW power output ideal for your application.

- **POWERFUL** / Up to 105 kW & 550 Nm
- **LOW EMISSIONS** / EU Stg.V ,US Tier 4,CN IV ready & HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Agricultural, Genset & EDG – version (Stg. IIIA, Tier 3)*
- **POWERPACK** / Modular, compact & ready for installation



*Emission Downgrade without EAT


DEUTZ TD 3.6 / TCD 3.6 HT / TCD 3.6

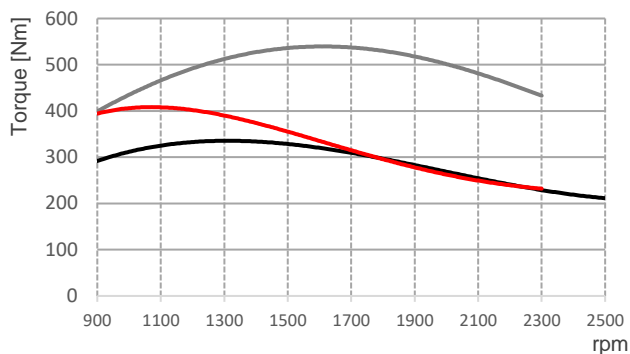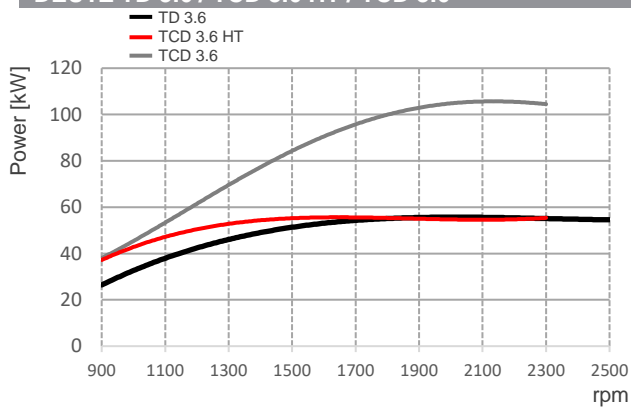

TECHNICAL DATA

ENGINE TYPE	TD 3.6	TCD 3.6 HT	TCD 3.6
No. of Cylinders	4	4	4
Displacement	l 3.6	3.6	3.6
Max. Nominal Speed	min ⁻¹ 2600	2300	2300
Aspiration	Turbocharger	Turbocharger with charge air cooler	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW 55.4	55.4	70 - 105
At Speed	min ⁻¹ 2600	2300	2300
Max. Torque	Nm 340	405	550
At Speed	min ⁻¹ 1600	1300	1600
Min. Idling Speed	min ⁻¹ 800	800	800
Weight (DIN 70020 Part 7A)	kg 350	350	350

DIMENSIONS

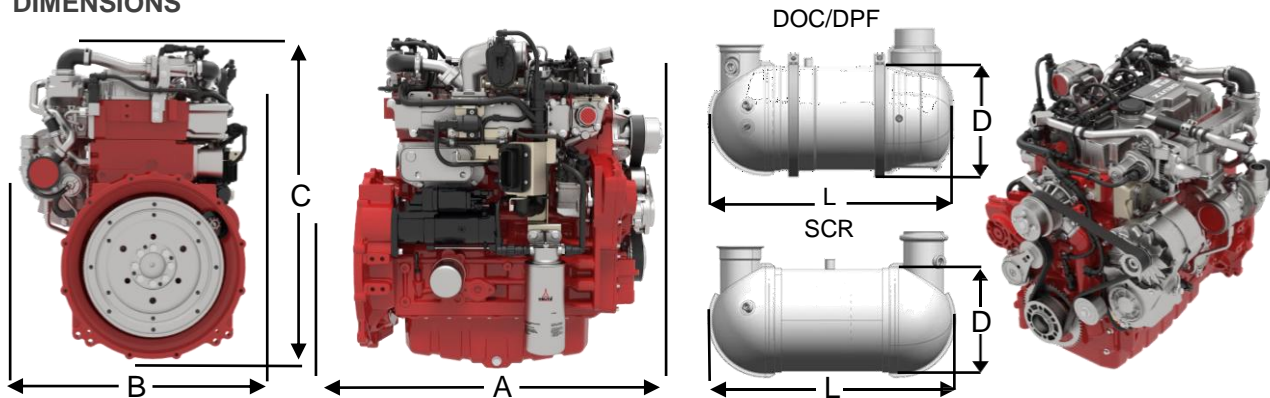

ENGINE TYPE	A	B	C	DOC/DPF		SCR		DOC/DPF	SCR
	mm	mm	mm	D	L	D	L		
T(C)D 3.6 (HT)	722	642 (641)	812 (793)	199	506	-	-	● ■	-
TCD 3.6 56 - 86 kW	722	641	793	199	612	240	598	● ■	● ■
TCD 3.6 > 86 kW	722	641	793	199	650	240	674	● ■	● ■

■ Standard for US Tier 4
● Standard for EU Stage V

