

DEUTZ TCD 3.9/4.0 L4

Powerful, efficient and compact.




For mobile machinery

The TCD 3.9/4.0 – With 75 up to 130 kW power output ideal for your application.

- **POWERFUL** / Up to 130 kW & 700 Nm
- **LOW EMISSIONS** / EU St.V & US Tier 4 certified; HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / 3.9 and 4.0 - version




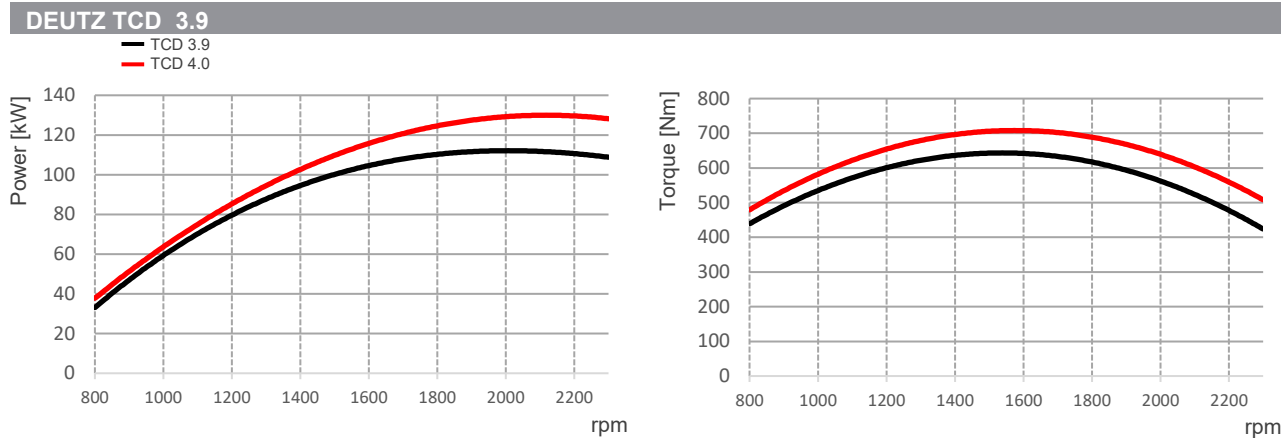

TECHNICAL DATA

ENGINE TYPE		TCD 3.9	TCD 4.0
No. of Cylinders		4	4
Displacement	l	3.94	3.94
Max. Nominal speed	min ⁻¹	2300	2300
Aspiration		Turbocharger with charge air cooler	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	75 - 110	110 - 129.4
At Speed	min ⁻¹	2300	2300
Max. Torque	Nm	642	700
At Speed	min ⁻¹	1300 - 1600	1300 - 1600
Min. Idling Speed	min ⁻¹	800	800
Weight (DIN 70020 Part 7A)	kg	450	450

DIMENSIONS

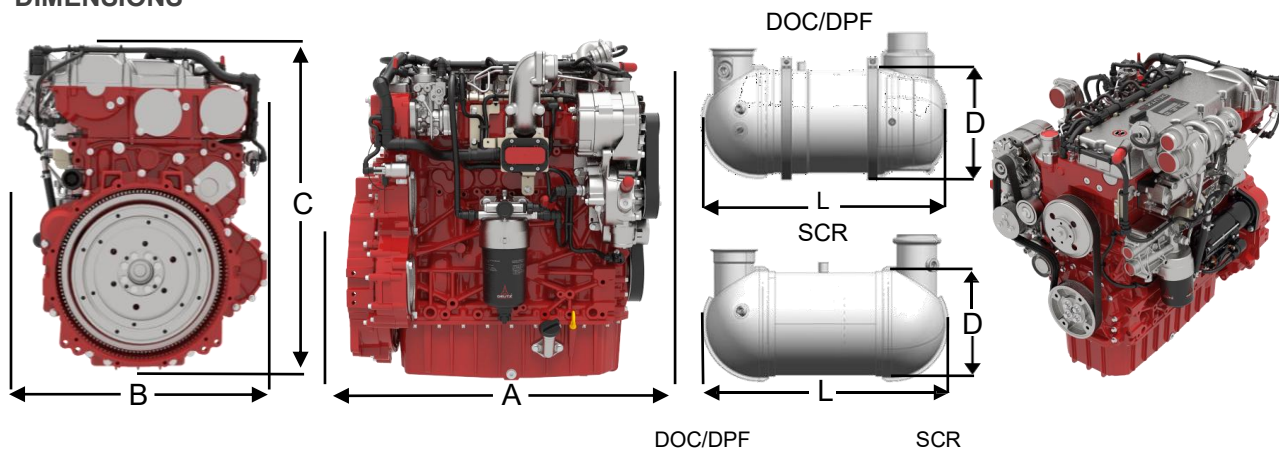

ENGINE TYPE		A	B	C	D	L	D	L	DOC/DPF	SCR
TCD 3.9	mm	751	672	843	277	611	277	593	● ■	● ■
TCD 4.0	mm	751	672	843	277	611	277	593	● ■	● ■

- Standard for US Tier 4
- Standard for EU Stage V

