

DEUTZ TCD 2.2

Powerful, efficient and compact.



For mobile machinery



The TCD 2.2 series – With up to 55.4 kW
Power Output ideal for your Application.

- **POWERFUL** / Up to 55,4 kW & 280 Nm
- **LOW EMISSIONS** / EU Stage V, Tier 4f, CN 4 & HVO certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Agricultural & EDG - Version* (Stage IIIA)
- **POWERPACK** / Modular, compact & ready for installation



*Emission Downgrade without EAT


DEUTZ D 2.2 / TD 2.2 / TCD 2.2

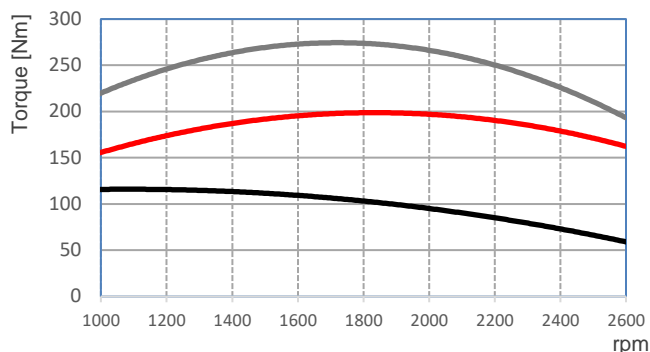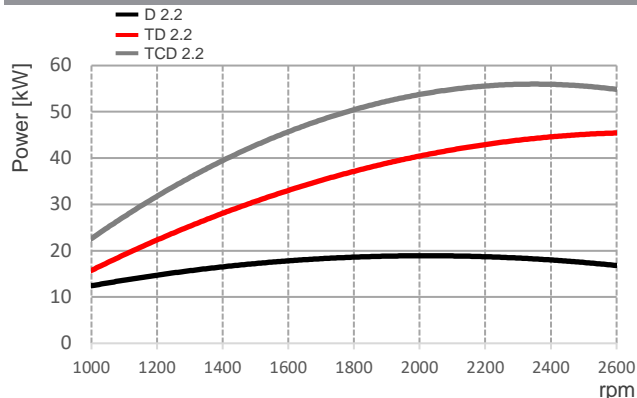

TECHNICAL DATA

ENGINE TYPE		D 2.2	TD 2.2	TCD 2.2
No. of Cylinders		3	3	3
Displacement	l	2.2	2.2	2.2
Max. Nominal speed	min ⁻¹	2600	2600	2600
Aspiration		Natural	Turbocharger	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	18.4	26 - 44.5	45 - 55.4
At Speed	min ⁻¹	2600	2600	2600
Max. Torque	Nm	125	205	280
At Speed	min ⁻¹	1400	1600	1600
Min. Idling Speed	min ⁻¹	900	900	900
Weight (DIN 70020 Part 7A)	kg	228	238	238

DIMENSIONS

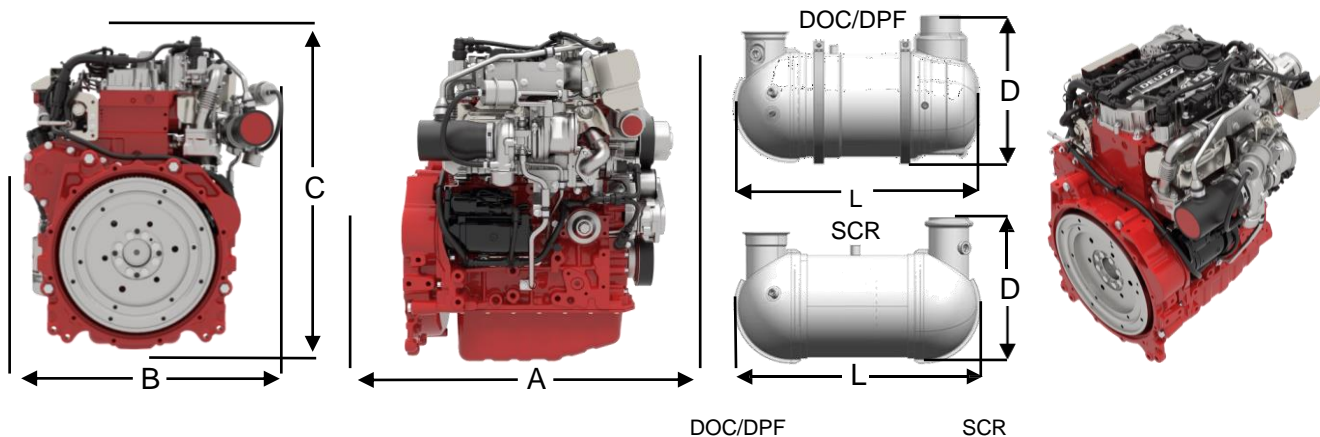

ENGINE TYPE		A	B	C	D	DOC/DPF		SCR		DOC/DPF	SCR
	mm					L	D	L	D		
D 2.2	mm	576	481	708	-	-	-	-	-	-	-
TD 2.2	mm	578	636	745	199	470	-	-	-	● ■	-
TCD 2.2	mm	576	630	719	199	506	-	-	-	● ■	-

- Standard for US Tier 4
- Standard for EU Stage V



DEUTZ AG
 Ottostraße 1
 51149 Cologne
 Germany
www.deutz.com
www.sdeutz.com