

DEUTZ TCD 12.0 V6



Powerful, efficient and compact.

For mobile machinery

The TCD 12.0 V6 – With 240 up to 390 kW power output ideal for your application.

- **POWERFUL** / Up to 390 kW & 2130 Nm
- **LOW EMISSIONS** / EU Stage V, Tier 4f, CN 4 & HVO certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Flat compact version available
- **POWERPACK** / Modular, compact & ready for installation





STAGE **V**
certified

CHINA
ready **4**

DEUTZ TCD 12.0 V6


— TCD 12.0 V6

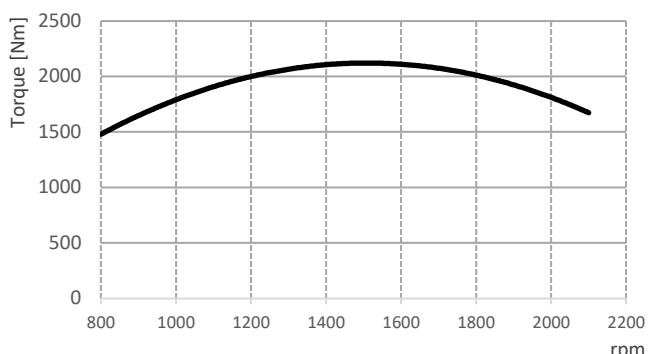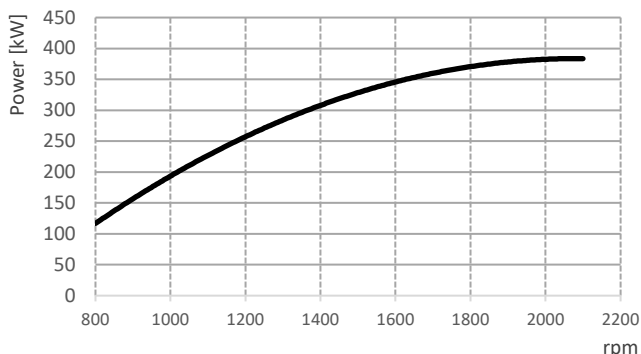

TECHNICAL DATA

ENGINE TYPE	TCD 12.0 V6	
No. of Cylinders		6
Displacement	l	11.906
Max. Nominal Speed	min ⁻¹	2100
Aspiration		Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	240 - 390
At Speed	min ⁻¹	2100
Max. Torque	Nm	2130
At Speed	min ⁻¹	1400
Min. Idling Speed	min ⁻¹	1000
Weight (DIN 70020 Part 7A)	kg	995

DIMENSIONS

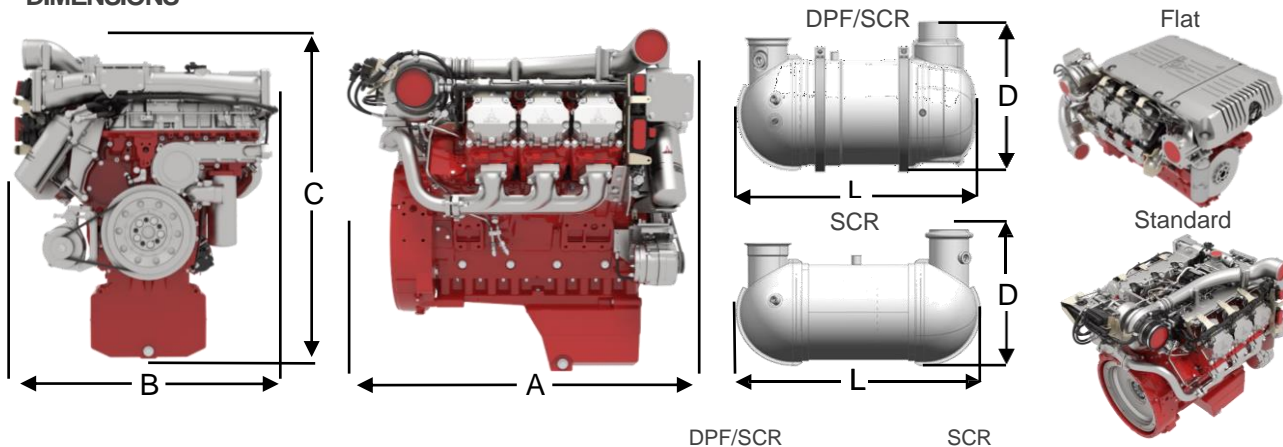

ENGINE TYPE		A	B	C	D	L	D	L	DPF/SCR	SCR
TCD 12.0 V6	mm	1198	948	1169	385	1364	385	1364	●	■

- Standard for US Tier 4: 2x SCR
- Standard for EU Stage V: 2x DPF/SCR

